

# ARES-530WT

Fanless Embedded Controller with Intel® E3845 /J1900 Processor




## Features

- **Fanless, Cable-less and Modularized Design**
- Wide Range DC Power Input (9 ~ 36V)
- Easy Installation/Maintenance
- Wall/Din Rail Moount
- Wide Operating temprature
- UL508 Certified (J1900 SKU)


System	
CPU	Soldered onboard Intel® Celeron® J1900 2GHz Processor or Intel® Atom™ E3845 1.91GHz processor
Memory	1 x 204-pin DDR3L SO-DIMM socket, supporting 1333MHz SDRAM: Atom™ E3845 : up to 4GB Celeron® J1900 : up to 8GB
Graphics	Integrated Intel® HD Graphics
ATA	2 x Serial ATA port with 300MB/s HDD transfer rate
LAN Chipset	2 x Intel i210IT PCIe GbE controllers
Watchdog Timer	1~255 levels reset
I/O	
Serial Port	1 x DB9 male connectors for RS-232/422 1 x DB9 male connectors for RS-422/485
USB Port	5 x USB2.0 type A connectors 1 x USB3.0 type A connector
LAN	2 x RJ-45 ports for GbE
Video Port	1 x VGA connector 1 x DVI-D connector
Expansion Bus	1 x Half size Mini-Card socket 2 x mSATA socket for SSD
Audio	Line-out
Button	1 x Reset button
Environmental	
Operating Temp.	-40 ~ 70°C (-40 ~ 158°F), ambient with air flow
Storage Temp.	-40 ~85 °C (-40 ~ 185°F)
Operating Humidity	10 ~ 95% @ 70°C (non-condensing)
Vibration	5~500Hz 3G rms X,Y,Z axis w/SSD, according to IEC 68-2-64 40G peak acceleration (11 m sec. duration), operation
Shock & Crash	60G peak acceleration (11 m sec. duration), non operation According to IEC 68-2-27
Qualification	

Certification	CE, FCC Class A UL508 (J1900 SKU)
Power Requirement	
Power Input	DC 9~36V input (w/ 3-pin DC input terminal block)
Power Consumption	13.5W
Storage	
Type	2 x mSATA socket
Mechanical	
Construction	Aluminum alloy
Mounting	DIN Rail quick release mounting kit
Weight	1650g
Dimensions (W x D x H)	70 x 125 x 160 mm
Ordering Information	
ARES-530WT-J1900	Barebone system with Intel® Bay Trail Celeron® J1900 DIN Rail controller
ARES-530WT-E3845	Barebone system with Intel® Bay Trail Atom™ E3845 DIN Rail controller



# Dimensions


ARES-530WT-J1900

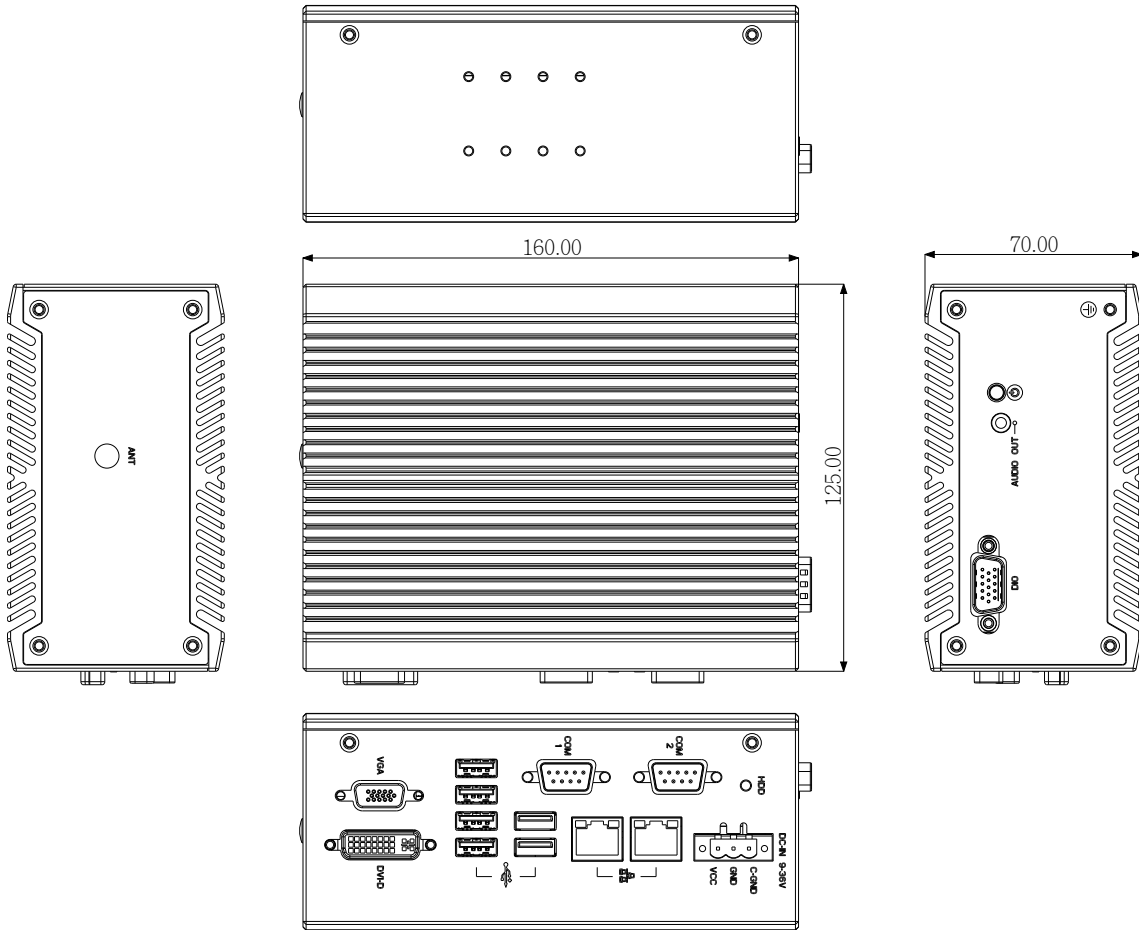



# Dimensions

ARES-530WT-E3845

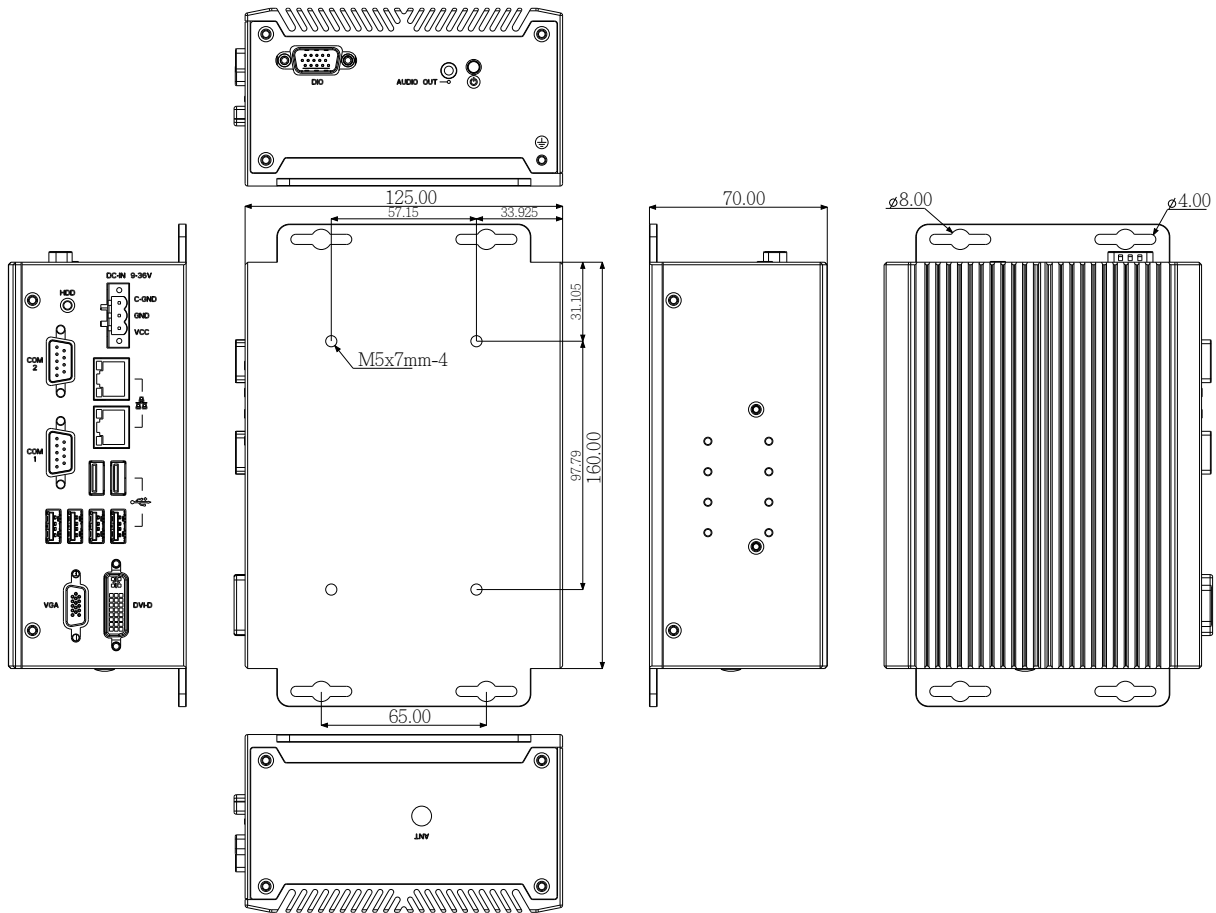

## Optional Configuration (CTOS \* Kit)

WIFI-AT2300

Atheros AR9462 Wi-Fi module w/ 20cm internal wiring



ANT-D11

1 x Wi-Fi Dual-band 2.4G/5G antenna



MM-3IL-4G

Industrial-grade DDR3L-1600 4GB SDRAM

MM-3IL-8G

Industrial-grade DDR3L-1600 8GB SDRAM

16GB SSD

mSATA MLC 16GB

32GB SSD

mSATA MLC 32GB



\*CTOS means Configure-to-Order Service.